



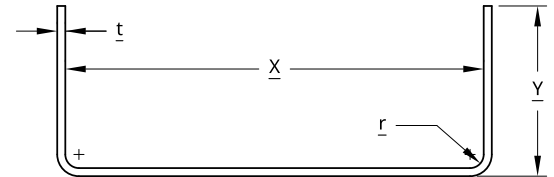

**KNUDSON**

# KFS-1622E STRUCTURAL FRAMEMAKER

## PROFILE Structure Stud and Track

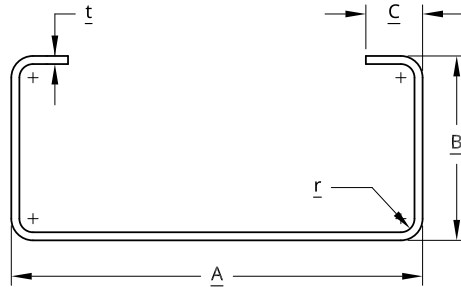

## PROFILE SPECIFICATIONS


- A 3.50, 3.63, 4.00, 5.50, 6.00, 8.00
- B 1.63, 2.0, 2.50
- C 0.63
- X 3.63, 3.75, 4.13, 5.63, 6.13, 8.13
- Y 2.50 Max
- r 0.090
- t 0.027 to 0.066

## MATERIAL SPECIFICATIONS

- Maximum Yield Strength = 65-ksi
- Maximum Tensile Strength = 75-ksi
- ASTM A1008 and ASTM 653
- Structural Steel
- Grade 33 and Grade 50

## MACHINE PERFORMANCE

- 120 feet per minute feed rate
- Integrated Digital Batch Controller
- Servo (electric) Drive
- Hydraulic Cut Off and Punch Tools

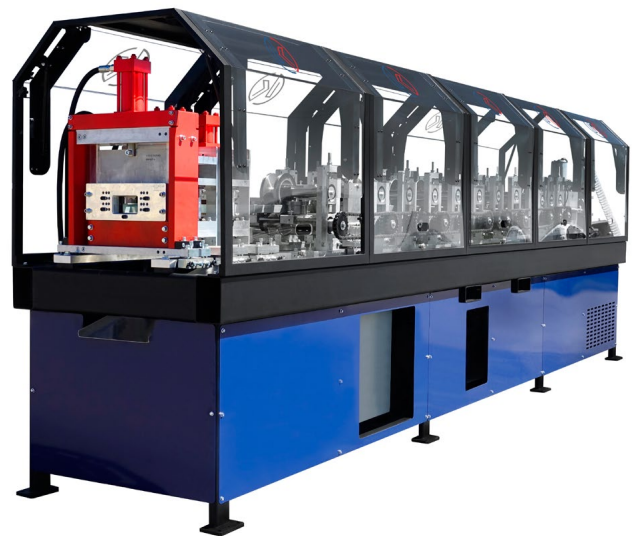

## OPTIONAL TOOLING

- Service Hole(s)
- Dimple Tool
- Index and Anchor Hole(s)
- Web and Flange Cuts



**KNUDSON MFG, INC.**

10401 West 120<sup>th</sup> Avenue  
Broomfield, CO 80021 USA

**KNUDSONMFG.COM**

+1 (303) 469-2101